



<b>LK FUGA®</b>	AAK506D●701
<b>LK OPUS®</b>	AAK506N●701

**⚠ ⚠ DANGER / FARE!**

**HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH**  
 ■ Turn off all power supplying this equipment before working on the equipment.  
 ■ Use a Voltage Tester of appropriate rating.  
**Failure to follow these instructions will result in death or serious injury.**

**RISIKO FOR ELEKTRISK STØD, EKSPLOSION ELLER LYSBUE**  
 ■ Afbryd strømforsyningen til dette denne indsats, før der foretages arbejdsopgaver på indsatsen.  
 ■ Brug en spændingstester med passende måleangivelse.  
**Manglende overholdelse af disse instruktioner kan medføre død eller alvorlig personskade.**




**⚠ ⚠ DANGER / FARE!**

**HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH**  
 If the USB charger insert is installed to replace a socket-outlet, connect the earth wires (PE) together with a junction block in order to have earth line continuity for all the socket outlets of this electrical circuit.  
**Failure to follow these instructions will result in death or serious injury.**

**RISIKO FOR ELEKTRISK STØD, EKSPLOSION ELLER LYSBUE**  
 Hvis USB strømforsyning installeres for at erstatte en stikkontakt, skal jordledningerne (PE) videreføres med samlemuffer for at sikre jordforbindelse til alle stikkontakter.  
**Manglende overholdelse af disse instruktioner kan medføre død eller alvorlig personskade.**

**en** Connection


**da** Tilslutning

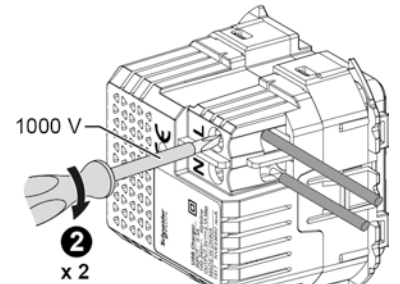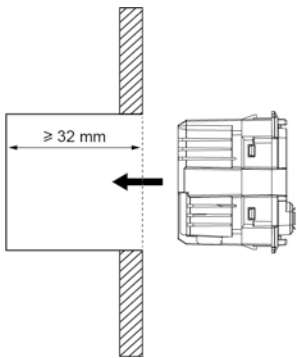

7 mm	0.75...2 x 2.5 mm <sup>2</sup>	0.33 N.m	0.6 mm x 3.5 mm	

**en** Use

**da** Anvendelse

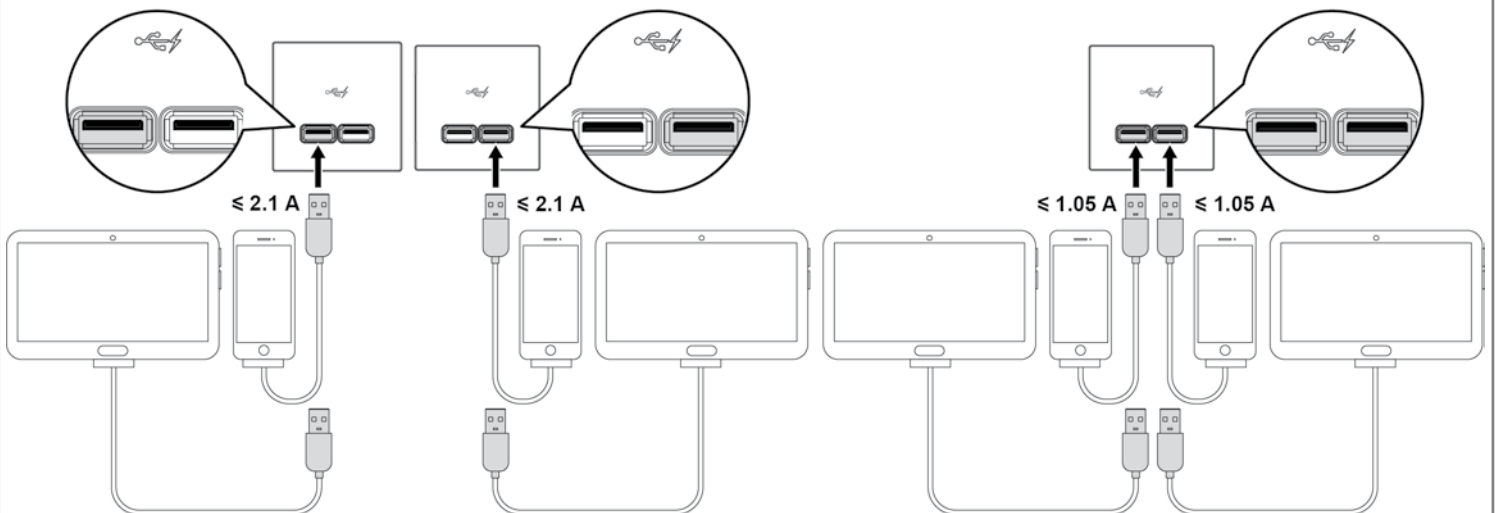

**en** Technical characteristics

USB type:	A
Nominal input voltage:	100-240 V $\sim$ $\pm$ 10 %
USB output voltage:	5 V $\text{---}$ $\pm$ 5 %
Nominal output current:	2.1 A if only one output (left or right) is used or 1.05 A if the left and the right outputs are used simultaneously
Power consumption:	< 0.1 W (in stand-by)
Maximum output power:	10.5 W
Expected lifetime:	30000 h for output power 10.5 W
Overvoltage category:	OVC III
Degree of protection:	IP20
Operating temperature:	-5°C...+30°C

**da** Tekniske data

USB type:	A
Mærkespændning:	100-240 V $\sim$ $\pm$ 10 %
USB udgangsspænding:	5 V $\text{---}$ $\pm$ 5 %
Mærkestrøm:	2,1 A hvis der kun bruges én udgang (venstre eller højre) eller 1,05 A hvis venstre og højre udgang bruges samtidigt.
Effektforbrug:	< 0,1 W (standby)
Maksimal udgangseffekt:	10,5 W
Forventet levetid:	30000 timer for en udgangseffekt på 10,5 W
Overspændingskategori:	OVC III
Kapslingsklasse:	IP20
Omgivelsestemperatur:	-5°C...+30°C