




BESKRIVELSE

59/9

Kraftig vinkelkuglehane med fuldt gennemløb, nippel/muffe
Rødt T-greb

EN 13828

DIMENSIONER



D"	1/2"	3/4"	1"
d	15	20	25
H	78	89	109
h	32	35	45
I	17	18	21.5
L	38	43	49.5
R	58	65	75
Acc.	1	2	3
Gr.	217	346	620

Alle gevind er i overensstemmelse med ISO 7/1 eller ISO 228

MATERIALER



Ventil CuZn40Pb2 Cw617N (DIN 50930 del.6)

Kugle CuZn40Pb2 Cw617N (DIN 50930 del.6)
Diamantslebet og hårdforkromet

Spindel CuZn39Pb3 Cw614N (DIN 50930 del.6)

Pakdåse CuZn39Pb3 Cw614N (DIN 50930 del.6)
Justerbar

Pakninger PTFE

O-ringe 2 x Viton®
PTFE pakning

Greb Aluminium

VARIANTER


59	M X M, Rødt T-greb
59/1	M X N, Rødt T-greb
59/2	N X N, Rødt T-greb
59/9	N X M, Rødt T-greb

GREBSVARIANTER

59	Rødt aluminium greb
----	---------------------


GODKENDELSER

TRYKTABSDIAGRAM

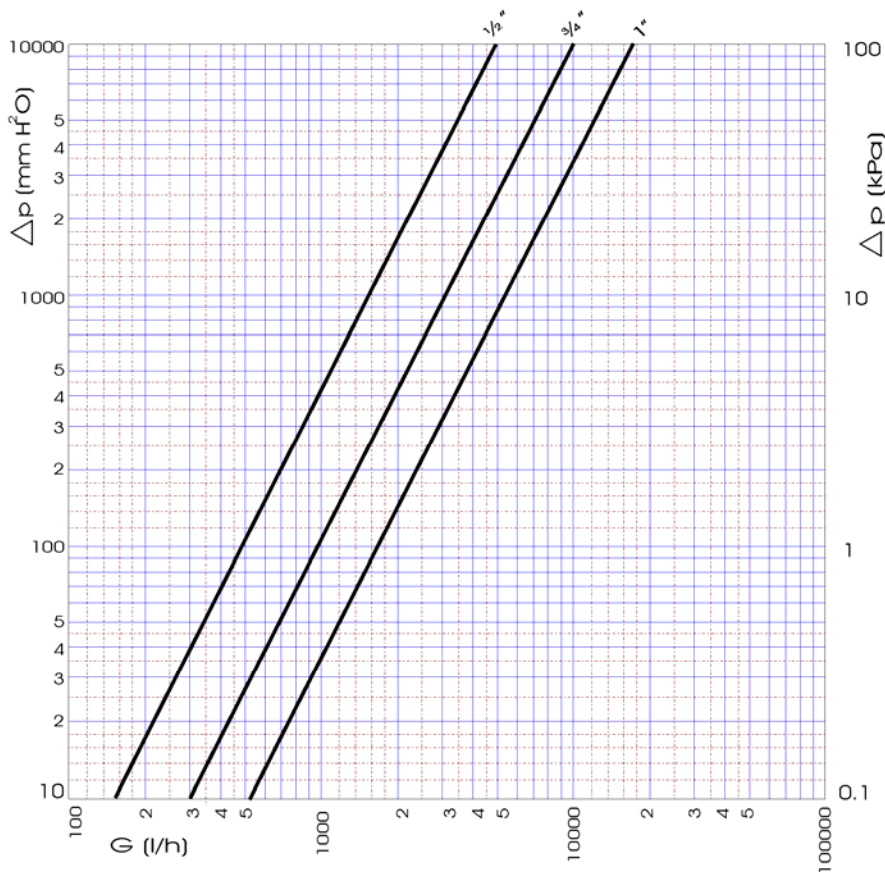

Dim.	1/2"	3/4"	1"
Kv	4.8	9.8	16.5

TEMPERATUR / TRYKDIAGRAM

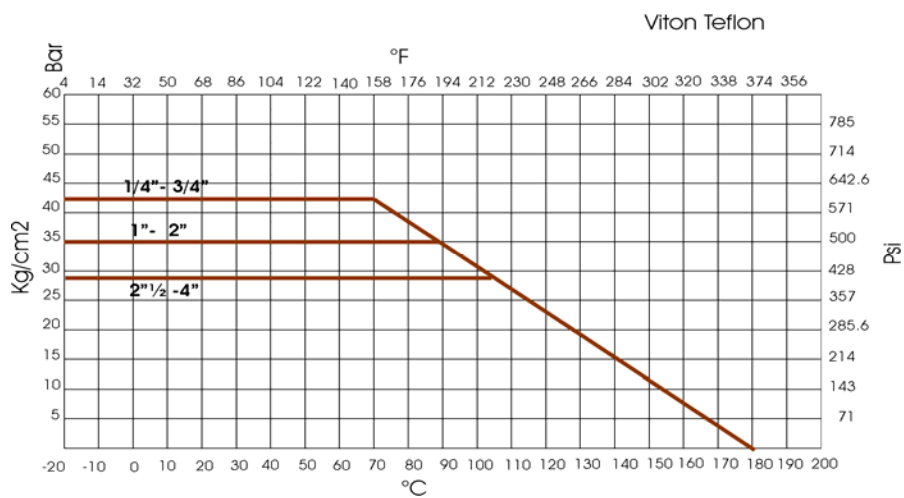

ANBEFALET DRIFTSTEMPERATUR/ MAKSIMALTRYK

30 bar - 100 °C - non shock
 10 bar - 150 °C - non shock