


SAUNA HEATERS

IMAGE® MODEL S & E

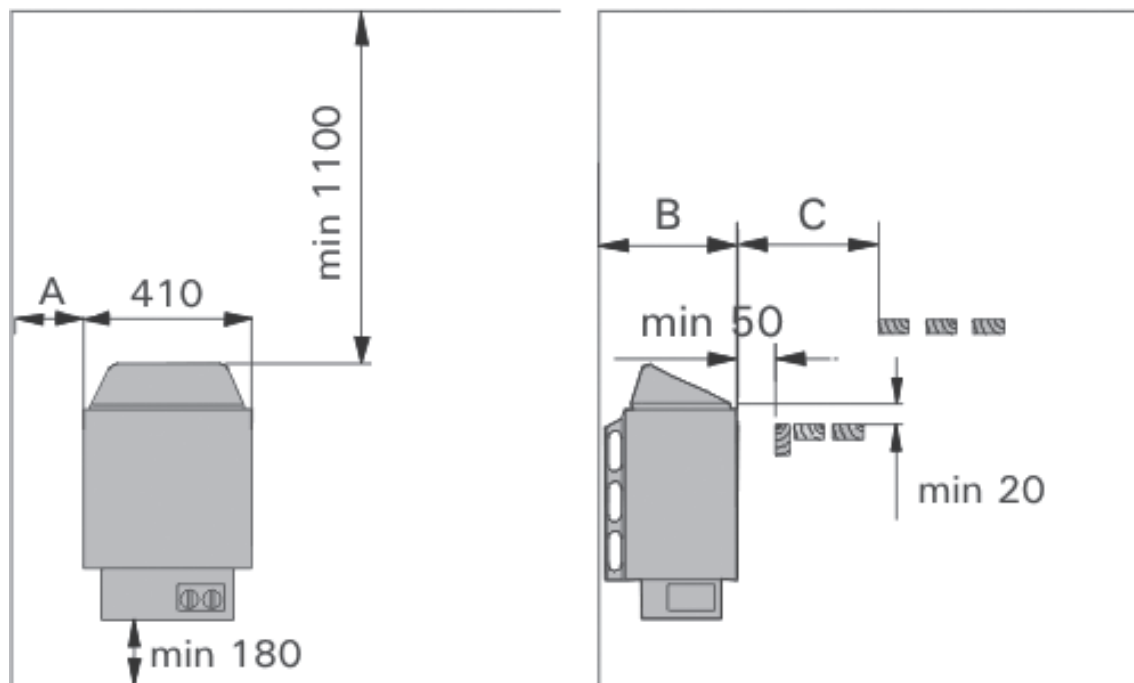

Model S & E	52-300045	52-300060	52-400060	52-300080	52-400080
Output kW	4.5	6	6	8	8
Sauna room min m ³	3	5	5	7	7
Sauna room max m ³	6	8	8	12	12
Sauna room height min cm	190	190	190	190	190
Stone space max kg	25	25	25	25	25
Dimensions width mm	410	410	410	410	410
Dimensions height mm	600	600	600	600	600
Dimensions depth mm	280	280	280	280	280
Weight kg	16	16	16	16	16
Supply voltage 3-phase	400V3N	400V3N	400V3N	400V3N	400V3N
Connecting cable mm ²	5 x 1,5	5 x 1,5	5 x 1,5	5 x 2,5	5 x 2,5
Fuse A	3 x 10	3 x 10	3 x 10	3 x 16	3 x 16
Supply voltage 1-phase. Options.	230V1N	230V1N	230V1N	-	-
Control unit	Built-in	Built-in	54-150400	Built-in	54-150400
Safety distance A to wall mm	35	50	50	100	100
Safety distance B to front lower platform mm	20	30	30	30	30
Safety distance C to upper platform mm	35	50	120	80	150
Safety distance D to ceiling mm	1100	1100	1100	1100	1100
Safety distance E to floor mm	150	150	150	150	150