
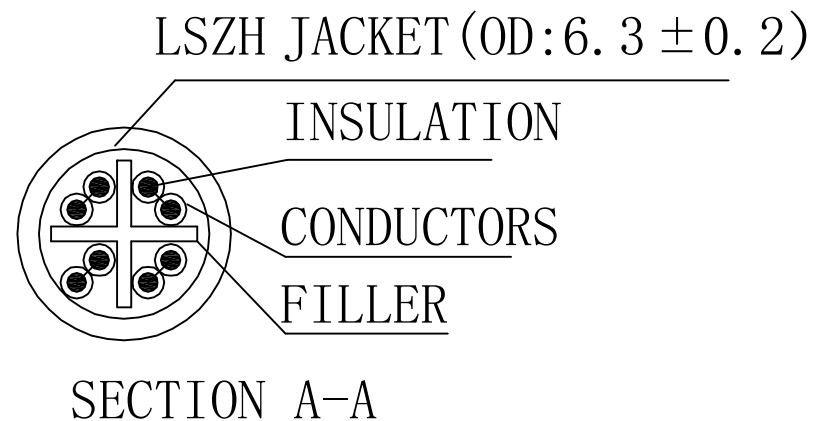


PIN OUT

| CN1 |     | CN2 | COLOR        |
|-----|-----|-----|--------------|
| 1   | —○— | 1   | WHITE/ORANGE |
| 2   | —○— | 2   | ORANGE       |
| 3   | —○— | 3   | WHITE/GREEN  |
| 6   | —○— | 6   | GREEN        |
| 4   | —○— | 4   | BLUE         |
| 5   | —○— | 5   | WHITE/BLUE   |
| 7   | —○— | 7   | WHITE/BROWN  |
| 8   | —○— | 8   | BROWN        |



1. 1 ALL COMPONENTS ARE RoHS COMPLIANT.
1. 2 100% OPEN AND SHORT TEST.
1. 3 ALL PRODUCTS PASS TIA CAT 6 CHANNEL TEST
1. 4 TEMPERATURE RANGE: -20—+60°C

| ③   | MOLDING    | 2PCS  | PURPLE PVC                         |
|-----|------------|-------|------------------------------------|
| ②   | CONNECTER  | 2PCS  | RJ45 (8P8C) MALE, GOLD PLATED PINS |
| ①   | CABLE      | 1PCS  | 24AWG*4P+FILLER+PURPLE LSZH JACKET |
| NO. | PARTS NAME | Q' TY | SPECIFICATION                      |

| APPROVED | CHECKED | DRAWN | CUSTOMER: |         |
|----------|---------|-------|-----------|---------|
|          |         |       | ITEM NO.  | TP-615P |
|          |         |       | DRAW NO.  |         |
|          |         |       | UNIT      | mm      |
|          |         |       | SCALE     | NONE    |

DESCRIPTION:

RJ45 (8P8C) M/M, UTP, CAT6 15m

